

**FOTON****AUMARK S**

## AUMARK S 8D15 Cab Chassis



\*Overseas model shown.

### WEIGHT RATINGS

GVM	7,495kg
GCM	10,995kg
TOWING CAPACITY <sup>1</sup>	3,500kg

### ENGINE

POWER	115kW @ 2600rpm
TORQUE	550Nm @ 1100-1900rpm

### TRANSMISSION

6 Speed Manual Transmission (MT)
6 Speed Automated Manual Transmission (AMT)

SAFETY SYSTEMS		
Anti-lock Braking System	(ABS)	●
Electronic Stability Program	(ESP)	●
Lane Departure Warning	(LDW)	●
Anti-Slip Regulation	(ASR)	●
Hill Start Assist	(HSA)	●
Electronic Brakeforce System	(EBS)	●
Autonomous Emergency Braking	(AEB)	●
Forward Collision Warning	(FCW)	●
Auto Vehicle Hold	(AVH)	●
LED Daytime Running Lights	(DRL)	●


SAFETY SYSTEMS	
Dusk Sensing Head Lights	●
Reverse Sensor	●
Reverse Camera	●
Reverse Buzzer	●
Remote Central Locking	●
Driver Airbag	●
Passenger Airbag	●
Cab Strength - ECE R29	●
Front Fog Lamp With Cornering Function	●

1. Maximum Braked Towing Capacity.

● STANDARD  
○ OPTIONAL  
— UNAVAILABLE

ENGINE	
Model	Cummins F3.8EVI156
Type	4 cylinder inline common rail diesel engine
Displacement	3760cc
Bore x Stroke	102 x 115mm
Compression Ratio	16.8 : 1

PERFORMANCE	
Maximum Power	115kW @ 2600rpm
Maximum Torque	550Nm @ 1100-1900rpm
Gradability	>35%
Fuel Injection	Electronically Controlled High Pressure Common Rail
Emission Standard	Euro 6e
Emission Technique	SCR+DOC+DPF

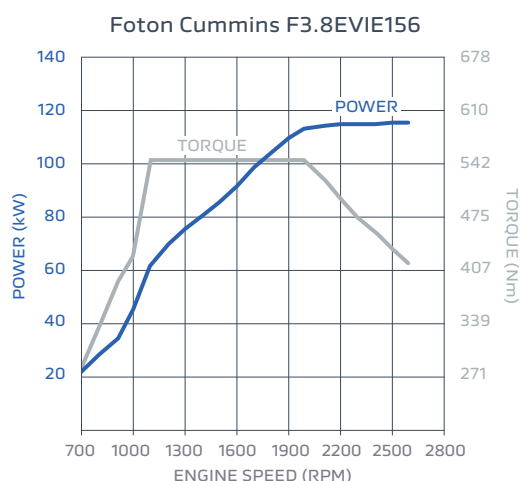

TRANSMISSION		MT		AMT	
Description		ZF 6S558TO		ZF 6AU558TO	
Number of Gears		6		6	
Selectable Gear Ratio		1st	6.198	1st	6.198
		2nd	3.287	2nd	3.287
		3rd	2.025	3rd	2.025
		4th	1.371	4th	1.371
		5th	1	5th	1
		6th	0.78	6th	0.78
		Reverse	5.681	Reverse	5.681
PTO Provision		●		●	
Driving Modes	Eco	●		●	
	Power	●		●	
	Snow	—		●	

CLUTCH		MT	AMT
Type	Dry Single Plate Diaphragm Spring Clutch	Dry Single Plate Diaphragm Spring Clutch	
Actuation	Hydraulic	Electronic/Hydraulic	
Diameter	362mm	362mm	

1. AMT only.

STEERING	
Type	Closed Recirculating Ball
Power Assist Type	Hydraulic Boost
Turning Radius	≤13.5m

SUSPENSION		
Type	Front	Multi-leaf Spring with Stabiliser Bar
	Rear	Multi-leaf Spring with Stabiliser Bar
Number of Leaf Springs	Front	3
	Rear	4+2
2-way (Front & Rear) Shock Absorbers		●

BRAKES		
Front	Type	Disc
	Diameter	330mm
Rear	Type	Disc
	Diameter	330mm
Parking Brake		Electronically Controlled Airbrake

AXLES		
Front Axle	Type	Forged & Stamped I-Beam
	Capacity	2850kg
Rear Axle	Type	Banjo (Stamped & Welded Housing)
	Capacity	6000kg
Rear Axle Ratio		4.3:1

WHEELS & TYRES		
Wheel Type		Aluminium Alloy
Front	Wheel Size (Diameter x Width)	17.5" x 6"
	Tyres (Width, Profile/ Diameter/Load Rating)	215/75R17.5 126/124M
	Steer Axle Tyre Capacity	3400kg
Rear	Wheel Size (Diameter x Width)	17.5" x 6"
	Tyres (Width, Profile/ Diameter/Load Rating)	215/75R17.5 126/124M
	Steer Axle Tyre Capacity	6800kg
Number of Studs		6
Spare Wheel Carrier		●

ELECTRICAL	
System Voltage	24V (100Ah)
Number of Batteries	2 connected in series
Alternator	70amp
Starter Motor	3.6kW

FUEL TANK	
Fuel Tank Material	Aluminium Alloy
Fuel Tank Capacity	120L

● STANDARD  
○ OPTIONAL  
— UNAVAILABLE

EXTERIOR FEATURES		
Forward Control Tilt Cab		●
Silver-coloured Grille		●
Lights	Halogen Headlights	●
	Halogen Side Indicators on Doors	●
	Halogen Tail Light Combination	●
	LED roof marker lamps	●
Mirrors	Exterior Mirrors x 5 (including Close proximity, Front Lower, Wide Angle)	●
	Heated Exterior Mirrors	●
	Power Mirror Adjustment	●
Two Speed Wipers		●

CABIN INTERIOR		
Seating	Capacity x 3	●
	3 Point ELR Outboard Seat Belts with Pretensioners	●
	Centre Seat Lap Seat Belt	●
Seat Adjustment	4-way Manual Driver's	●
	2-way Manual Passenger	●
Infotainment Unit	7-Inch Touchscreen	●
	AM/FM Radio	●
	Reversing Camera	●
	Bluetooth® Handsfree Mobile Communication <sup>1</sup>	●
	USB-A Port	●
	SD Card Slot	●
	AUX Port	●
Storage	Foldable Centre Seat	●
	Storage Box and x 2 Cupholders	●
	Center Console with 3 Cupholders	●
	Driver & Passenger Side Pocket	●
	Door Pockets	●
	Driver & Passenger Overhead Net Shelf	●
	Back of Centre Seat	●
Height & Telescopic Manual Adjustable Steering Wheel		●
Single Zone Manual Air Conditioning		●
Power Windows		●
24V Power Socket - Centre Console		●
Halogen Reading Lights on Roof		●
Door & Roof Pillar Mounted Entry Assist Grips		●

CHASSIS FRAME	
Type	Riveted Longitudinal Beam High Strength Steel
Side Rail Dimensions	214x65x5mm (LxWxH)
Rear Frame Width	800mm

DIMENSIONS (mm)	
Cab Type	Single Wide
Cab Width	2,060
Overall Length	5,960
Overall Width	2,136
Overall Height	2,260
Wheelbase	3,360
Front Track	1,762
Rear Track	1,615
Front Overhang	1,110±10
Rear Overhang	1,380±10
Minimum Ground Clearance	170

WEIGHTS (kg) <sup>2</sup>	
Tare Mass	2,920
Gross Vehicle Mass (GVM)	7,495
Gross Combined Mass (GCM)	10,995
Maximum Braked Towing Capacity	3,500

MODEL CODES	CODE
Aumark S 8D15 MT Cab Chassis	S0815MBWQC
Aumark S 8D15 AMT Cab Chassis	S0815ABWQC

1. Compatible Apple® or Android™ device required. 2. All weights are +/- 3%.

FOTON Automotive Australia offers this information as a general guide to product specifications. All data is believed to be correct as at February 2025, however, as development is an ongoing process, changes may occur from time to time which will not necessarily be reflected herein. Therefore, FOTON Automotive Australia reserves the right to change specifications without notice. Accordingly, this information should not be regarded as an infallible guide to correct specifications, nor does it constitute an offer for sale of any particular vehicle. Whilst all care has been taken to provide you with information in regards to the general use of PEUGEOT products, you should not rely solely on the information provided in this brochure. Dealers are not agents of FOTON Automotive Australia and have absolutely no authority to bind FOTON Automotive Australia by an express or implied undertaking or representation. Inchcape Automotive Distribution Australia Pty Ltd ABN 72 637 080 927 trading as FOTON Automotive Australia.

● STANDARD  
○ OPTIONAL  
— UNAVAILABLE